

SCAN PRO IVS

LED Diffuse Reflection Downlight

Valmuevej 74, DK-8700 Horsens

Phone +45 23 30 99 90 - Email mogens@scan-pro.dk

www.scan-pro.dk




LED Diffuse Reflection Downlight



With driver box on bottom

Model	Specification								Pris -D/+D
	LED	Power	Input Voltage	Color Temperature	Warranty	Size (mm)	Hole Size(mm)	CRI	≥ 100 DKK
CST-LD-DR-5W	SMD2835	5W	AC85-265V	2700-6500K	3years	∅ 110*H35mm	∅ 92-100mm	>80	
								>95	
CST-LD-DR-10W	SMD2835	10W	AC85-265V	2700-6500K	3years	∅ 150*H47mm	∅ 130-140mm	>80	
								>95	
CST-LD-DR-18W	SMD2835	18W	AC85-265V	2700-6500K	3years	∅ 180*H52mm	∅ 160-170mm	>80	
								>95	


LED Diffuse Reflection Downlight

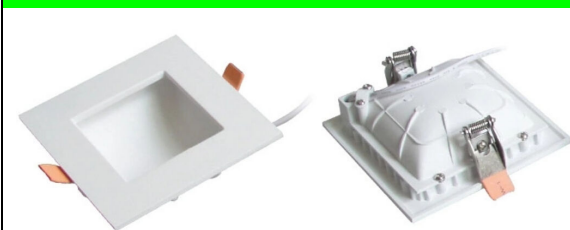

With driver box on bottom

Model	Specification								Pris -D/+D
	LED	Power	Input Voltage	Color Temperature	Warranty	Size (mm)	Hole Size(mm)	CRI	
CST-LD-DS-8W	SMD2835	8W	AC85-265V	2700-6500K	3years	110*110*H35mm	92*92-100*100	>80	
								>95	
CST-LD-DS-16W	SMD2835	16W	AC85-265V	2700-6500K	3years	150*150*H47mm	130*130-140*140	>80	
								>95	
CST-LD-DS-20W	SMD2835	20W	AC85-265V	2700-6500K	3years	180*180*H52mm	160*160-170*170	>80	
								>95	

Innovative DOOM SURFACE REFLECTION Light Guide

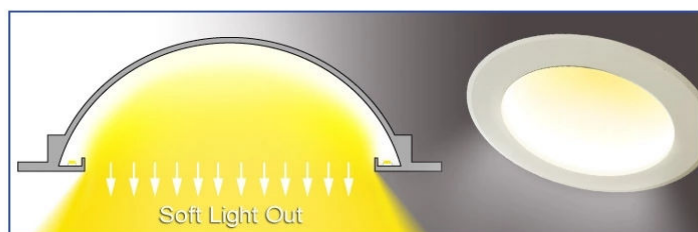

Innovative Optical Design

Doom surface reflection & very soft light out



Excellent thermal design

Aluminiums housing & heatsink
better heat dissipation



Optimized LED layout

Lower temperature and longer lifespan
More uniform light out

Minus D betyder IKKE dæmpbar

Plus D betyder dæmpbar